

Información de producto | FICHA TÉCNICA

VINYL PRIMER

400 ml, 10.72 Oz, 304 g. NET WT.

GENERAL DESCRIPTION

Resin-based primer that once painted over previously painted MTN vinyl paint, causes the MTN vinyl paint to become permanent, preventing and/or making it difficult to be removed from non-porous surfaces.

FEATURES

- Easy to apply and repaint.
- Avoids removability of vinyl paint.
- Applicable on most plastics and metals.

APPLICATIONS

For applications where a soft touch finish is desired (a characteristic of the MTN vinyl paint), and the vinyl paints removability is not required.

Good results are obtained on the majority of nonporous surfaces; metals and plastics, although different results are obtained depending on the nature of each surface: excellent results on iron, aluminum, ABS, PC, PVC, PET, and on PP, HDPE, and PA, the removability of the vinyl paint is moderately more difficult.

INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. Clean surface with a degreaser or any other product specifically required for each particular surface. Rinse with water or solvent and let the surface dry.
- Apply a thin layer. Let the primer dry for approximately 5-10 minutes. Following, the vinyl paint may be applied to achieve the desired finish.
- Turn the aerosol upside down to clean out the valve after use. If te nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

PHYSICAL PROPERTIES

Color:	Transparent
Shine:	Mate
Dry to the touch (ASTM D-1640 ISO 1517):	20'
Completely dry (ASTM D-1640 ISO 1517):	2 h
Thickness of dry layer (ASTM D-823 ISO 2808):	15 micras/layer
Theoretical yield (continuous painting):	2,5 m ² for 400 ml
Product life:	(Well Stored) 5 Years
Recoatable:	30'
Condition for application:	Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity 85% R.H.P
Heat resistance of paint:	100°C

Last date review: 26/04/2016.


CAUTION



APPARENCE



LABEL

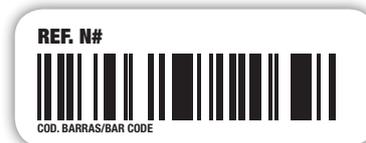

EX014V0201 Vinyl Primer

CAP SYSTEM



PACKAGING

Low pressure.
Nominal capacity: 400 ml.
Heat resistance of packaging: <50°C
Propellant: GLP – HC C₃-C₄

Box (6 units)
205 X 140 X 200 mm.

